


BILL OF MATERIALS		
		WEIGHT/ING
1	RB-DV45/V MANIFOLD(SP)(INSIDE)	301/137
2	INLET FILTER	55/25
3	DISCHARGE SILENCER-#12.30-4.5	140/64
4	2" 4" CHECK VALVE	25.1/11.4
5	GRUNOX TYPE VACTUALC-4"(INSIDE)	68.3/3
6	GEARS BOX 400	25/12
7	INLET AIR CONDUIT	132/60
8	OIL LEVELS & WINDOWS	0.44 / 0.2
9	ACOUSTICAL ENCLOSURE	77/35
10	4-WAY VALVE AND PIPING ASSY-4" 38 / 17	8.4 / 3.81
11	RELIEF VALVE 2" -0496-87	0.75/0.34
-	SET 15 PSIG	0.86/0.3
12	PRESSURE GAUGE (P1)	0.66/0.3
13	VACUUM GAUGE (V1, V2)	1.32/6
14	SPOOL D.N.4" - 4"Lq. (INSIDE)	8.8/4
15	COUPLING L110H SHARED(UNSA) COMPRESS OF	
1	ELEMENT L110H HTTREL	
1	BLOWER HALF L110X#38MM	
1	GEAR HALF L110X#1 1/4"	
16	MISCELLANEOUS	33/15
		889/395

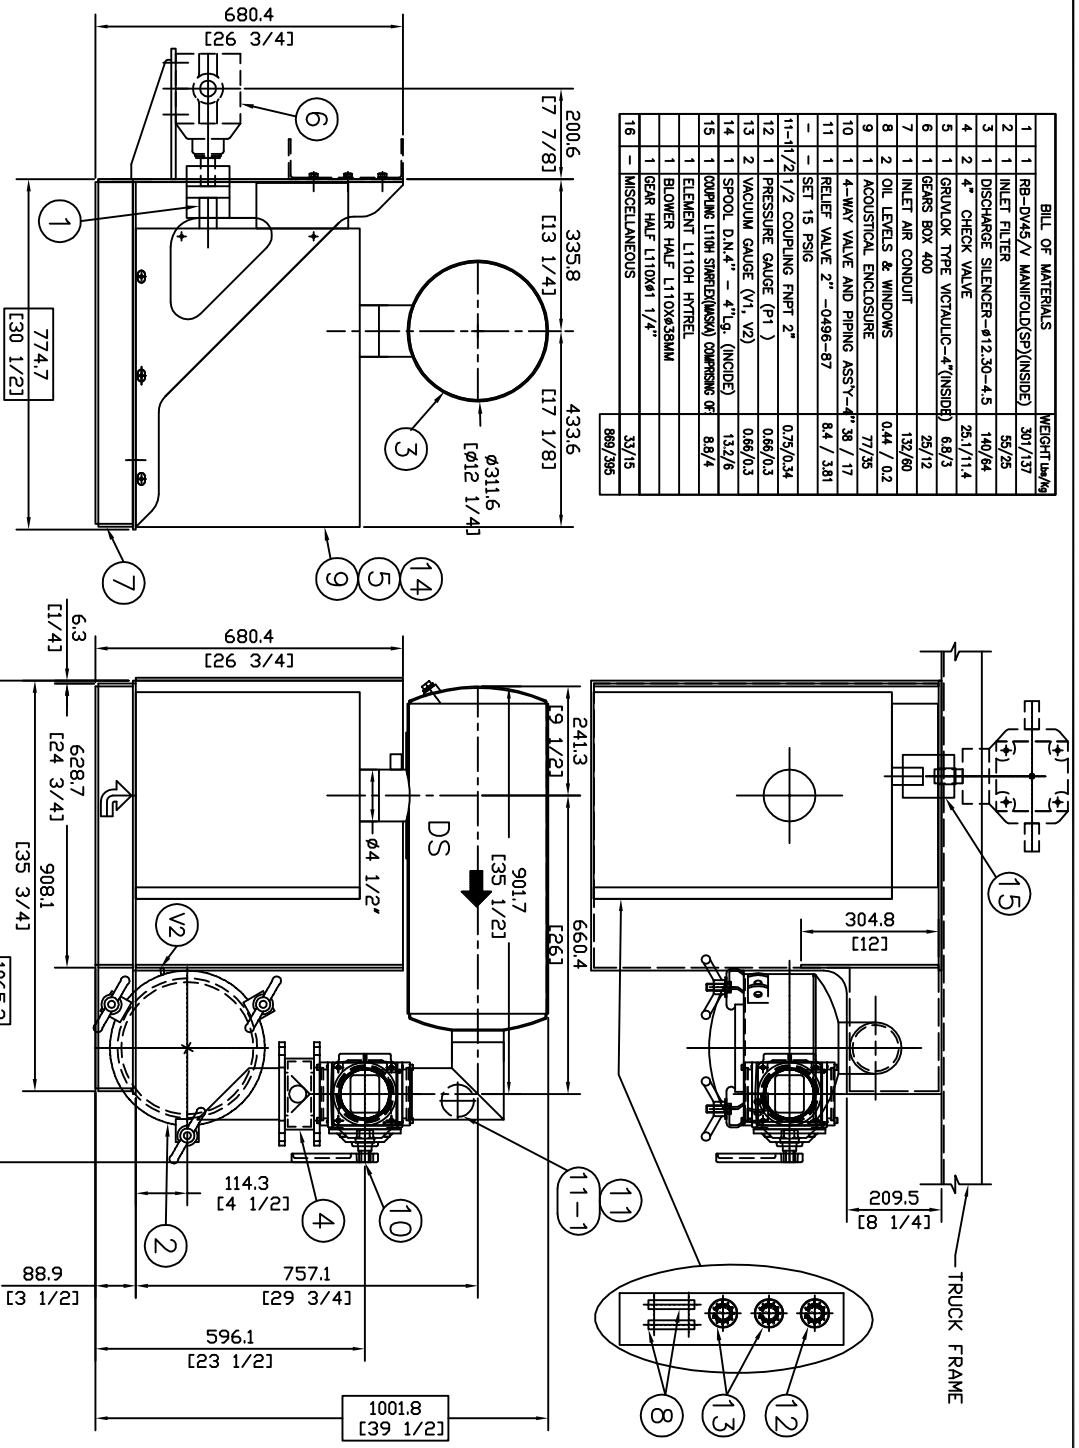

P1 - OUTLET PRESSURE
V1 - INLET VACUUM
V2 - VACUUM BEFORE FILTER

INLET
 DISCHARGE
 AIR INJECTION

SUPPRESSEUR 4S
108 BEAUVAIS DELSON JSB 1W8
TEL: (450) 638-9563, FAX: (450) 638-9562

RB-DV-45/V-FI-SD (GEAR BOX) / GENERAL ARRANGEMENT
PROJECT #:

PROPRIETARY NOTICE
THIS DRAWING AND ALL THE INFORMATION THEREON IS THE PROPERTY OF "SUPPRESSEUR 4S". THIS DRAWING IS NOT TO BE COPIED OR USED FOR ANY PURPOSE EXCEPT BY WRITTEN CONSENT OF "SUPPRESSEUR 4S".

PROJECT: _____
SCALE: N
DRAWN BY: V.B.
CHECKED BY: D.L.
DATE: 16.05.2012
SHEET #: 1/1
DRAWING #: RBDV45_V-FI-SD_CCW_CB_cr
REV: 3